

GENERAL PUMP *A member of the Interpump Group*

FEATURES

- Light Cracking Pressure
- Stainless Body with Stainless Wetted Parts
- O-ring on Poppet for a Leak Proof Seal
- Solid Body Construction, Won't Come Apart During Installation

Check Valves


Stainless Steel Check Valves



SPECIFICATIONS

Part Number	YCV14FSS	YCV38FSS	YCV12FSS	YCV34FSS
Body Material	Stainless Steel			
Max Volume	6.5 GPM	10.5 GPM	21.0 GPM	48.0 GPM
Max Discharge Pressure	6,500 PSI			
Max Fluid Temperature	195° F			
Port Sizes	1/4" NPT	3/8" NPT	1/2" NPT	3/4" NPT
Cracking Pressure	5.8 PSI	5.8 PSI	4.4 PSI	3.0 PSI
Shipping Weight	.5 lbs			
Length	1.85"	2.13"	2.60"	3.50"

PARTS LIST

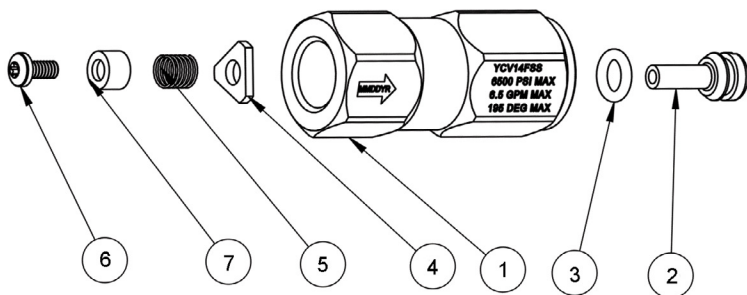

No.	Part No.	Description	Qty.
1	520239	Body, Checkvalve, YCV14FSS	1
	520240	Body, Checkvalve, YCV38FSS	1
	520241	Body, Checkvalve, YCV12FSS	1
	520242	Body, Checkvalve, YCV34FSS	1
2	520235	Piston, Checkvalve, YCV14FSS	1
	520236	Piston, Checkvalve, YCV38FSS	1
	520237	Piston, Checkvalve, YCV12FSS	1
	520238	Piston, Checkvalve, YCV34FSS	1
3	701009V90	O-ring, Viton, YCV14FSS	1
	701011V90	O-ring, Viton, YCV38FSS	1
	701111V90	O-ring, Viton, YCV12FSS	1
	701113V90	O-ring, Viton, YCV34FSS	1
4	540081	Retainer, YSC14FSS	1
	540082	Retainer, YSC38FSS	1
	540083	Retainer, YSC12FSS	1
	540084	Retainer, YSC34FSS	1
5	720062	Spring, YCV14FSS	1
	720063	Spring, YCV38FSS	1
	720064	Spring, YCV12FSS	1
	720064	Spring, YCV34FSS	1
6	201008	Screw, 4-40 UNC, T8, YCV14FSS	1
	201009	Screw, 8-32 UNC, T15, YCV38FSS	1
	201010	Screw, 1/4-20 UNC, YCV12FSS	1
	201011	Screw, 1/4-20 UNC, YCV34FSS	1
7	520347	Spring Stop, YCV14FSS	1
	520348	Spring Stop, YCV38FSS	1
	520349	Spring Stop, YCV12FSS	1
	520349	Spring Stop, YCV34FSS	1



General Pump
is a member of
the Interpump Group

