

FEATURES


- Strong brass structure
- Highly shock resistant ceramic seat and nozzle
- Oversized bearings for long life
- Can be used in any position



SPECIFICATIONS


Part Number	YR23K20	YR23K25	YR23K30	YR23K35	YR23K40	YR23K45	YR23K50	YR23K55	YR23K60	YR23K65	YR23K70	YR23K80
Size	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	8.0
Inlet	1/4" BSP-F				1/4" NPT-F			1/4" BSP-F				
Minimum Pressure	435 PSI											
Maximum Pressure	2300 PSI											
Maximum Temperature	212° F											
Weight	0.9 lbs											

DIMENSIONS

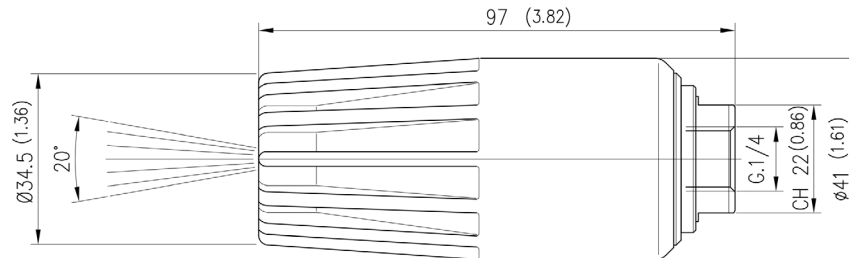

PARTS LIST

No.	Part No.	Description	Qty.
1	Y25166331	Coupling, 1/4" NPT-F, YR23K40	1
1	Y25163431	Coupling, 1/4" NPT-F, YR23K45	1
1	Y25163431	Coupling, 1/4" NPT-F, YR23K50	1
1	Y25163531	Coupling, 1/4" BSP-F, YR23K55	1
1	Y25163531	Coupling, 1/4" BSP-F, YR23K60	1
1	Y25164531	Coupling, 1/4" BSP-F, YR23K65	1
1	Y25163631	Coupling, 1/4" BSP-F, YR23K70	1
2	Y10307201	O-ring, 1.78 x 20.35, Ni 85	1
3	Y25162663	Washer, 14.8 x 23 x 0.1 mm, Sst.	1
4	Y25163122	Turbine	1
5	Y25168324	Spacer Kit, YR23K20	1
5	Y25165924	Spacer Kit, YR23K25	1
5	Y25166024	Spacer Kit, YR23K30	1
5	Y25163324	Spacer Kit, YR23K35	1
5	Y25163724	Spacer Kit, YR23K40	1
5	Y25163724	Spacer Kit, YR23K45	1
5	Y25163824	Spacer Kit, YR23K50	1
5	Y25166824	Spacer Kit, YR23K55	1
5	Y25163924	Spacer Kit, YR23K60	1
5	Y25164024	Spacer Kit, YR23K65	1
5	Y25164124	Spacer Kit, YR23K70	1
5	Y25166924	Spacer Kit, YR23K80	1
6	Y25162485	Seal, 7.2 x 12 x 6	1
7	Y25162231	Housing	1
8	Y25168185	Knob, Yellow	1
10	Y10323000	O-ring, 3.53 x 7.52	2

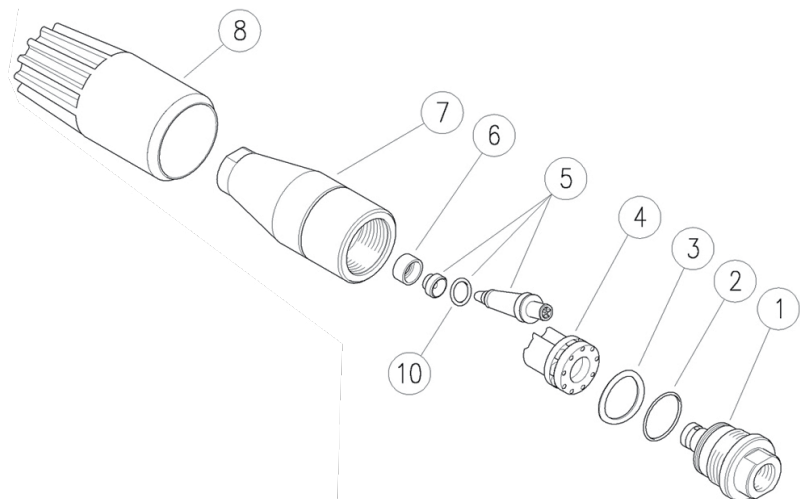

General Pump is a member of the Interpump Group

