


# Adjustable Injector

Quick Connect - SS Plug

## SPECIFICATIONS

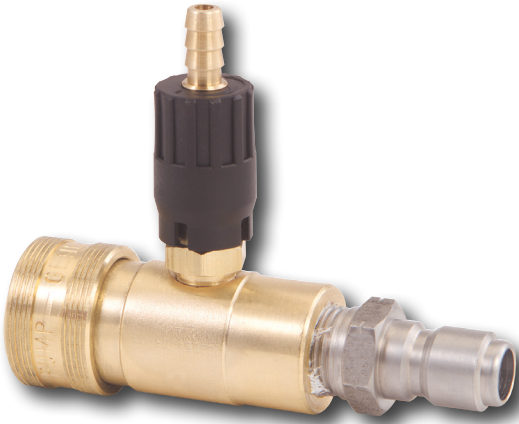

Part Number	100633	100634	100635
Nozzle Diameter	.070"	.083"	.091"
Maximum Volume	2-3 GPM	3-5 GPM	5-8 GPM
Maximum Pressure	3500 PSI		
Flow Direction	F → M	F → M	F → M
Maximum Temperature	190° F		
Inlet Port-3/8" QD	Coupler	Coupler	Coupler
Outlet Port-3/8" QD	Plug	Plug	Plug
Hose Barb Size	1/4"		
Dimensions	3.875" L x 1.125" W x 2.875" H		
Weight	0.55 lbs		
Materials	Brass, Stainless Steel, Viton		

## PARTS LIST

Item	Part No.	Description	QTY.
1	510287	Housing, Injector, 3/8" QD, 3/8 NPT-F, FM, Brass (100633)	1
	510288	Housing, Injector, 3/8" QD, 3/8 NPT-F, FM, Brass (100634, 100635)	
2*	720040	Spring, Conical, .437" FL, 316 SS	1
3*	520008	Ball, Injector, 316 SS	1
4*	701032	O-Ring, 50 Duro, Viton, .176" ID x .070" CS	1
5	510262	Post, Adjustable Hose Barb, Brass	1
6	520116	Nozzle, QD Injector, .070" Ø, 303 SS (100633)	1
	520115	Nozzle, QD Injector, .083" Ø, 303 SS (100634)	
	520127	Nozzle, QD Injector, .091" Ø, 303 SS (100365)	
7	520117	Ball, 5/32", 440C	8
8*	701049	O-Ring, 70 Duro, Viton, .487" ID x .103 CS	1
9	720041	Spring, .920" OD, .62" FL, 302 SS	1
10	510249	Collar, 3/8" QD Brass	1
11	520136	Plug, 416 SS, 3/8" QD, 3/8 NPT-M	1
12	510263	Knob, Adjustable Hose Barb, Brass	1
13*	701501	O-Ring, 70 Duro, Viton, .208" ID x .070" CS	1
14	201002	Socket Set Screw, SS	1
15	202031	Retaining Ring, .71" ID, .048" CS, 302 SS	1
*	100593	Repair Kit	

